

PRODUCT SPECIFICATION

Category 5e U/UTP Patch Cable, 24AWG×4P, PVC

STANDARD COMPLIANCES

All Category 5e Requirements as Per ANSI/TIA, ISO/IEC, and CENELEC EN Standards
ANSI/TIA-568.2-D Cat.5e

ISO/IEC 2nd Edition 11801 Class D

CENELEC EN 50173-1

IEC 61156-6, CENELEC EN 50288-3-2 for patch cable

Flame Retardancy is Verified According to IEC 60332-1-2

We Implemented RoHS Compliance for the Requirement of European Union Issued Directive (EU) 2015/863

CONSTRUCTION & CHARACTERISTICS

Conductor	Material / Size	Bare Copper / 24AWG
Insulation	Material	HDPE
	Thickness	Nominal: 0.186 mm
	Diameter	Nominal: 0.96 mm
	Colors	Blue/White-Blue Orange/White-Orange Green/White-Green Brown/White-Brown
	Unaged Elongation	Min. 300%
	Unaged Tensile Strength	Min.1.683 Kg/mm ²
Jacket	Material	Flame Retardant PVC
	Thickness	Nominal: 0.5 mm
	Diameter	Nominal: 5.4 mm
	Color	Assorted upon request
	Unaged Elongation	Min. 100%
	Unaged Tensile Strength	Min. 1.407 Kg/mm ²
	Aging at 100°C for 168Hrs	Min. elongation retention:50% Min. tensile strength retention:75%
Marking		CAT.5E U/UTP PATCH ETL/3P VERIFIED TO ANSI/TIA-568.2-D & ISO/IEC 11801 ED.2 & EN 50288-3-2 & IEC 60332-1-2 ▲ 24AWGX4P CMX(UL) c(UL) CMH E164469-XX or as customer request.

APPROVALS



ETL /3P Certified ANSI/TIA-568.2-D Category 5e testing safety/performance requirements.

[UL/cUL Listed](#)

APPLICATIONS

1000BASE-T Gigabit Ethernet
 10BASE-T, 100BASE-TX Fast Ethernet (IEEE 802.3)
 100 VG - AnyLAN(IEEE802.12), 155/622 Mbps ATM
 550MHz Broadband Video
 Voice, T1, ISDN

ELECTRICAL PERFORMANCES


Dielectric Strength of Insulation		2850 V dc / 2 seconds		
Insulation Resistance Test		Min. 5000 MΩ·Km		
Conductor Resistance		Max. 9.38 Ω/100m at 20°C		
Resistance Unbalance		Max. 2%		
Capacitance Unbalance		Max. 160 pF/100m		
Mutual Capacitance		Max. 5600 pF/100m		
Impedance	772kHz	102Ω ± 15%		
	1~125MHz	100Ω ± 15%		
Attenuation & Near End Cross Talk	Frequency (MHz)	Max.Attenuation (dB/100 meters)	NEXT (dB), Min.	PSNEXT (dB), Min.
	1 MHz	2.0*	65.3*	62.3*
	4 MHz	4.1*	56.3*	53.3*
	8 MHz	5.8*	51.8*	48.8*
	10 MHz	6.5*	50.3*	47.3*
	16 MHz	8.2*	47.2*	44.2*
	20 MHz	9.3*	45.8*	42.8*
	25 MHz	10.4*	44.3*	41.3*
	31.25 MHz	11.7*	42.9*	39.9*
	62.5 MHz	17.0*	38.4*	35.4*
	100 MHz	22.0*	35.3*	32.3*
	125 MHz	24.9*	33.8*	30.8*

The asterisked (*) value are for information only. The minimum Next coupling loss for any pair combination at room temperature is to be greater than the value determined using the formula:

$$NEXT(f \text{ MHz}) \geq NEXT(0.772) - 15 \log_{10}(f \text{ MHz} / 0.772) \text{ dB}$$

CONFIGURATION

orange 2	green 3
white/orange	white/green
blue 1	brown 4
white/blue	white/brown

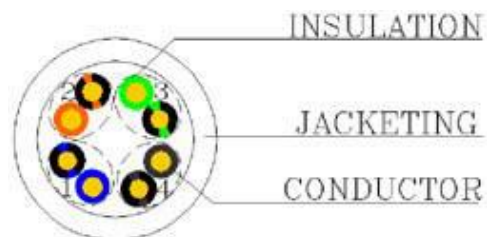

COLOR INFORMATION

Part No.	PACKAGING	COLOR	
		Manufacturer standard No.	RAL/PANTONE No.
39-3617	305M/Plastic reel in box	BR020	Pantone 7518c
39-3618		OR307	Pantone 1575c
39-3619		RD220	Pantone 2450c
39-3620		BK012	Pantone Black 6c
39-3621		WH928	between RAL 9003 and RAL 9010
39-3625		GY825	Pantone cool gray 3c
39-3626		RD210	Pantone 186c
39-3627		GN509	Pantone 3415c
39-3628		BU608	Pantone 7691c
39-3629		YE406	Pantone 143c
39-3630		PU720	Pantone 7677c