


PIN OUT

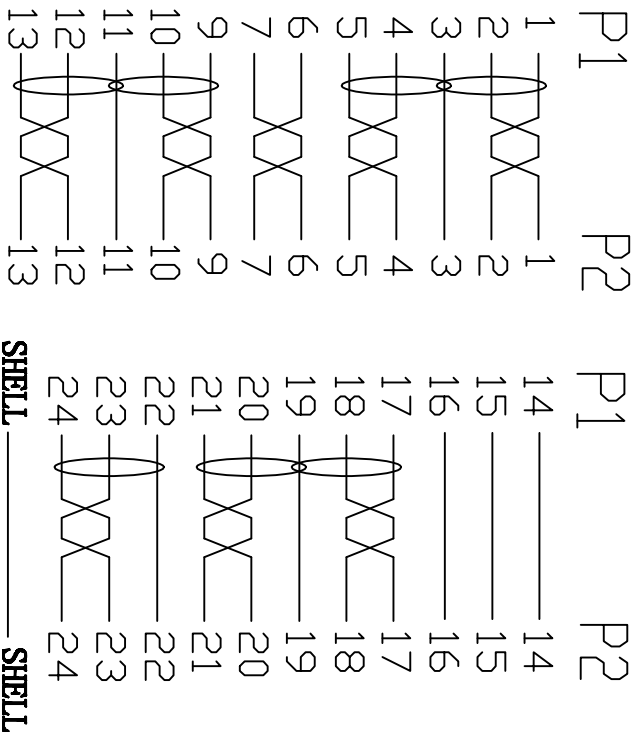

REQUIREMENTS:

1:100% short,open and miss wire test.

2:Insulation resistance:DC300V 10MΩ(Min)
Conduction resistance 5Ω(Max)

⑥	OUTER MOLDED	BLACK 45P PVC	0.048	KG
⑤	INTER MOLDED	LDPE	0.021	KG
④	SCREW	#4-40UNC 2.3*45.5MM,BLACK PVC	4	PCS
③	FERRITE CORE	F5B:RH14.2*28.5*9.5	2	PCS
②	CONNECTOR	DVI 24+1 /MALE,BLACK INSULATOR,GOLD PLATED SHELL,GOLD PLATED PIN	2	PCS
①	CABLE	(1P*30#+FME+D+AL+MYLAR)*7C+1P*30#+3C*30#+ADB JACKET: BLACK PVC OD:7.3±0.15MM	3000	MM
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by ACHY	Checked by HELEN	Approved by - date MARCH 6,2012	File name DVI/24+1 M/M 3M	Date MARCH 6,2012	Scale FREE	
ANGLE:	DVI 24+1 M-M 30AWG					
UNIT:MM						