


1 2 3 4 5 6

A

B

C

D

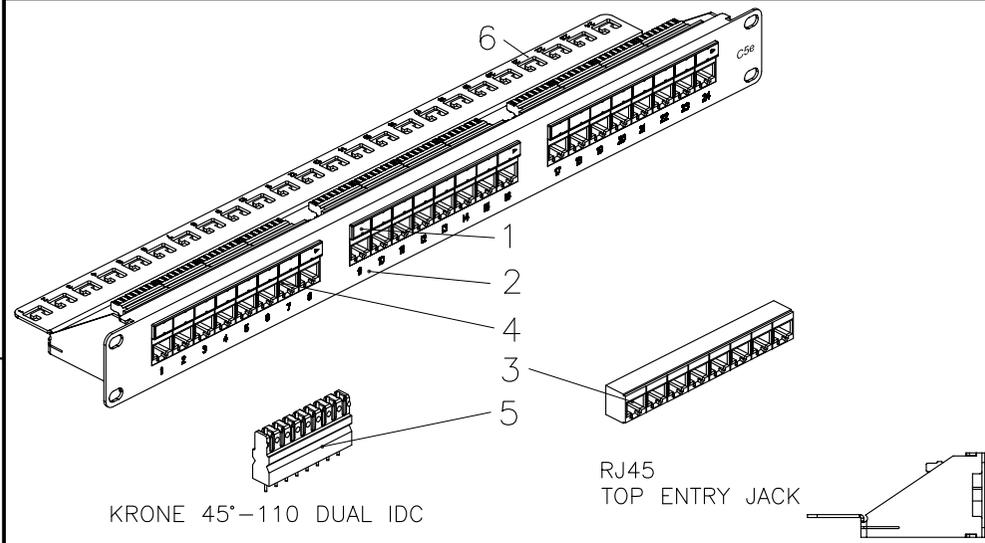

KRONE 45°-110 DUAL IDC



RJ45 TOP ENTRY JACK

SCALE 1/4

Specification :

- Material :
- Identification :
 - 1-1. I.D. Plate : PVC, Transparent color.
 - 1-2. Paper.
 - 1-3. Frame : ABS, UL 94V-0.
 - Panel : SPCC, 1.5 mm thickness with Black(RAL9005) color painted.
 - RJ45 Jack :
 - 3-1. Housing : ABS, UL 94V-0.
 - 3-2. Contact Bracket : PC, UL 94V-2, Transparent area.
 - RJ45 Jack Contact :
 - 4-1. Material : Phosphor Bronze with Nickel plated.
 - 4-2. Finish : 50 micro-inch Gold plated on Plug contact area.
 - IDC :
 - 5-1. Housing : PC+Glass Fiber, UL 94V-2.
 - 5-2. Terminal : Phosphor Bronze with Tin plated.
 - Support Bar : SPCC, 1.5 mm thickness with Black(RAL9005) color painted.
 - PCB : FR4, UL 94V-0.

- Performance :
- T568A & T568B wiring.
 - Insertion force : 20N max. (IEC 60603-7-4)
 - Retention strength : 7.7 kg between Jack and Plug.
 - Operating temperature : -10°C to 60°C. (ISO/IEC 11801, ANSI/TIA/EIA 568 B.2)
 - Life(mating cycles) :
 - * Jack : 750 cycles min. (ISO/IEC 11801, IEC 60603-7-4)
 - * IDC : Suitable for 22-26 AWG stranded and solid wire, compatible with both 110 & Krone punch down tools.
 - The Cat.5e transmission performance is in compliance with the ANSI/TIA/EIA 568 B.2 standard.

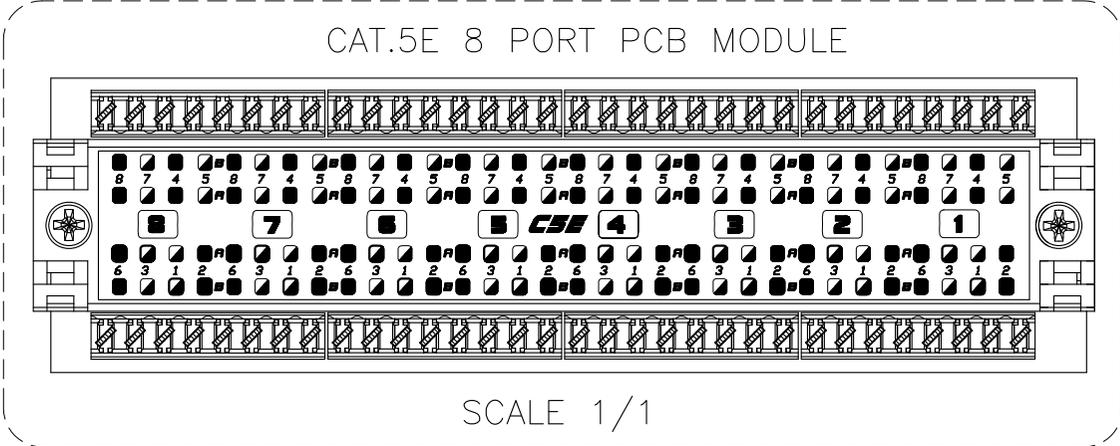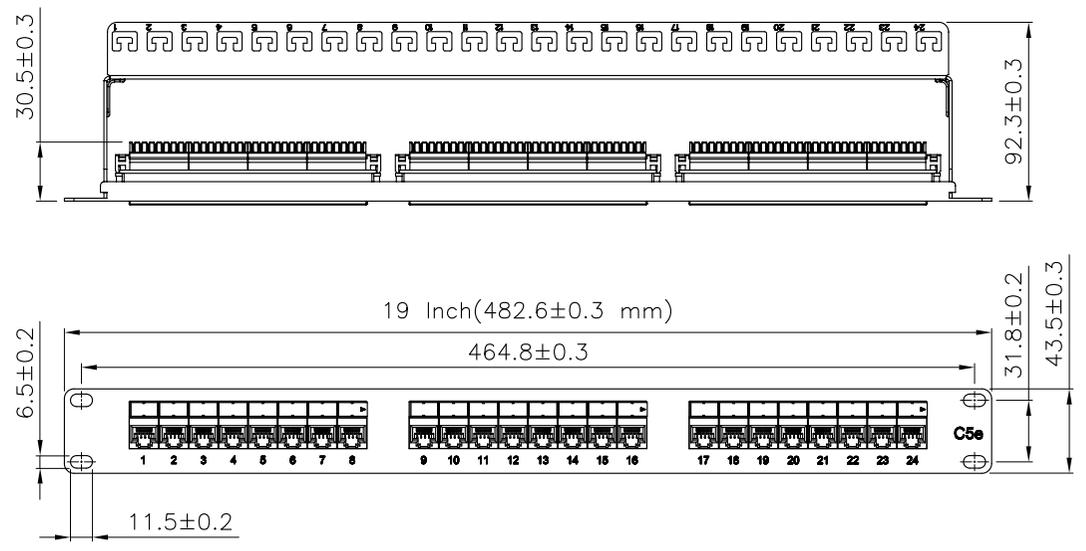

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING	25.NOV.2010	QIQI	Cablenet
	CHECK	25.NOV.2010	JANE	
	APPROVAL	25.NOV.2010	JAIMY	
		DATE	NAME	ITEM NO.:
SCALE	1/4 (A4)	UNIT	mm	DES.: CAT.5E UNSHIELDED PATCH PANEL
	DRAWING NO.	AAAFB2402133101 PHB24T-KDA-CEC(SA4)		
	DRAWING CLASSIFICATION	S	SHEET	1 1

1 2 3 4 5 6

10cm

