
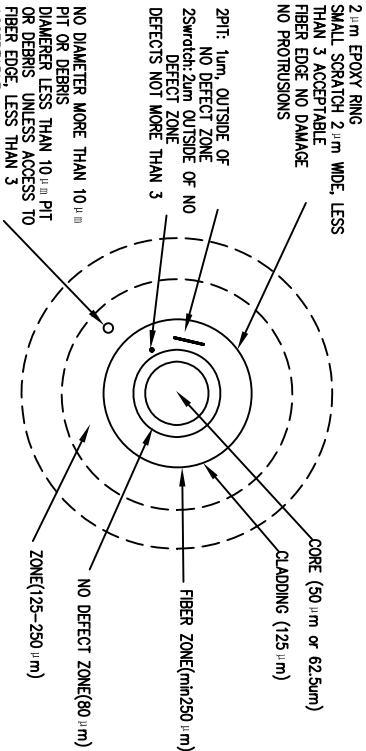


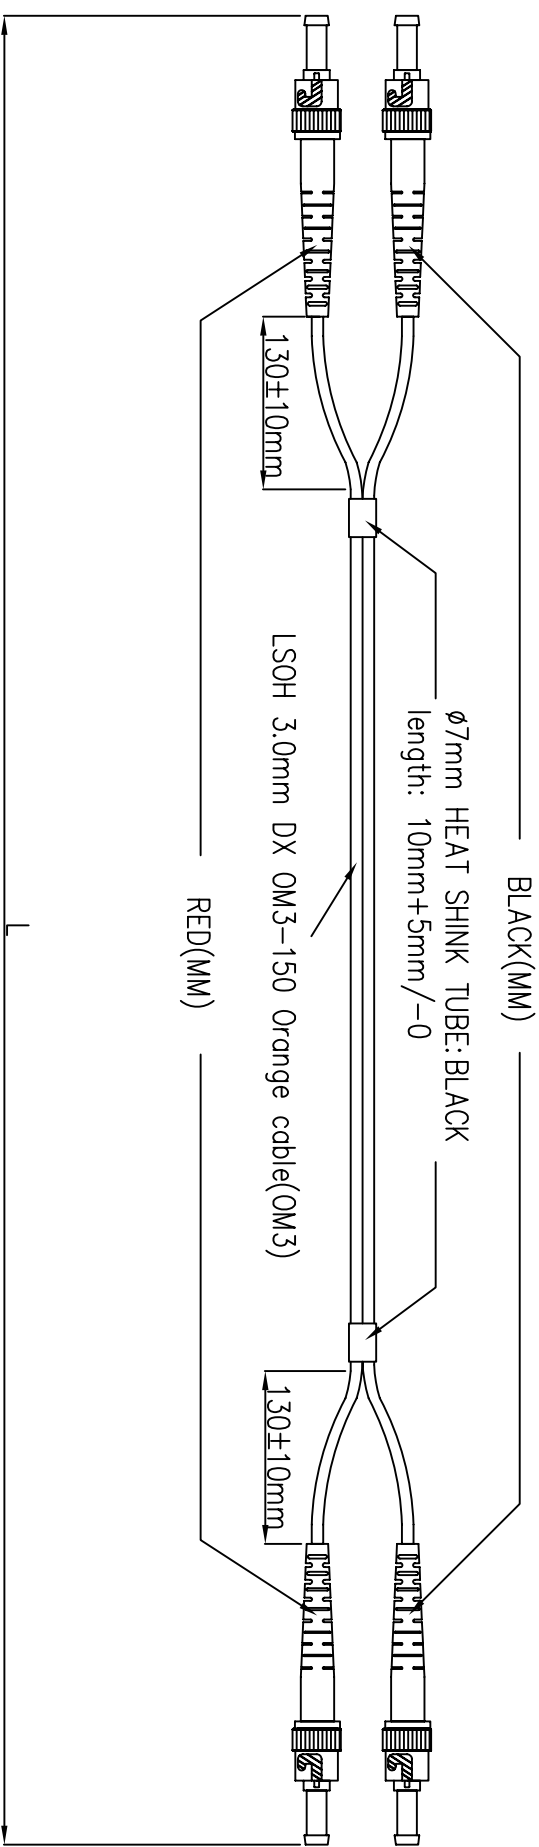

2.0um EPOXY RING
SMALL SCRATCH 2.0um WIDE, LESS
THAN 3 ACCEPTABLE
FIBER EDGE NO DAMAGE
NO PROTRUSIONS

2PIT: 1um, OUTSIDE OF
NO DEFECT ZONE
25width:2um, OUTSIDE OF NO
DEFECT ZONE
DEFECTS NOT MORE THAN 3

NO DIAMETER MORE THAN 10.0um
PIT OR DEBRIS
DIAMETER LESS THAN 10.0um PIT
OR DEBRIS, UNLESS ACCESS TO
FIBER EDGE, LESS THAN 3
ACCEPTABLE
NO PROTRUSIONS
IN THE FERRULE CONTACT ZONE

(MM) FIBER END-FACE STANDARD

SPECIFICATIONS:

Type	Multi-Mode	Single Mode
Insertion Loss	≤0.5dB	≤0.2dB
Return Loss	≥20dB	≥55dB
Test Wavelength	850nm	1310nm

LENGTH TOLERANCE:

LENGTH (L)	TOLERANCE
< 1M	+50mm/-0
1M < 10M	+100mm/-0
10M < 30M	+150mm/-0
≥30M	+1%/-0

	Designed By JUNE.L 2015.02.03	DESC. DR3 ST-ST
Tolerances unless otherwise specified: Scale Version	Checked By Approved By	DRG. No. H01-STST-003
1.0 sheet 1 of 1		