

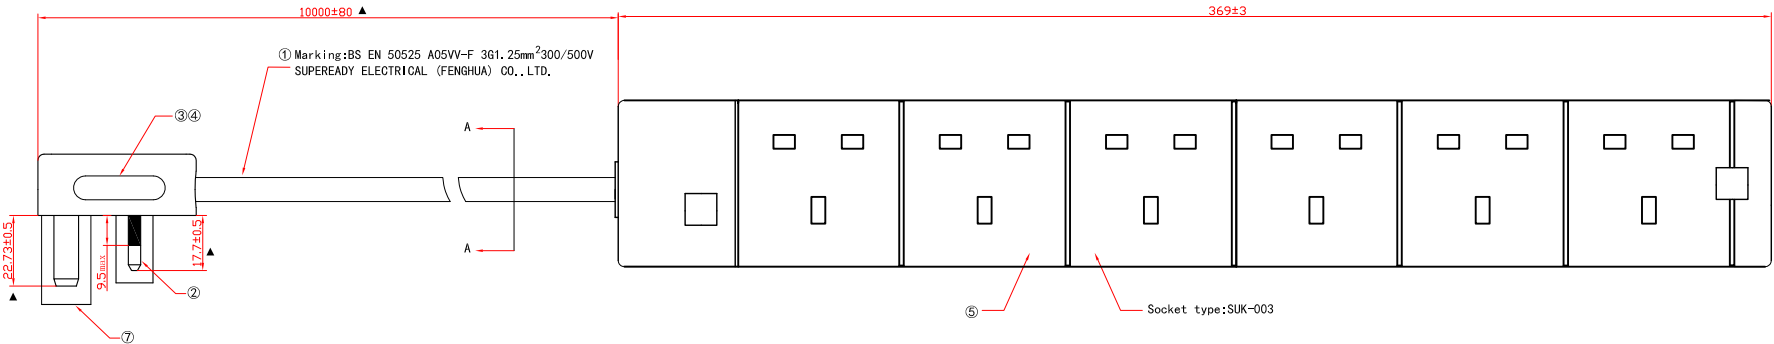


Technical requirement 技术参数:
1. Electrical Characteristics Test电气性能检验
1.1 Products 100% for electrical test.成品100%电性测试.
1.2 Insulation resistance:More than 100MQ of 500V DC, Conductor resistance:Less than3.0Q.
绝缘阻抗: 大于或等于100MQ 500V DC, 导通阻抗小于等于3.0Q.
2. Finish shell product conditions 成品状态.
2.1 The attachment plug front show the test mark of "T".
插头主视图须有测试标志"T".
2.2 The dimension with "▲" must be control and insoected importantly.
带"▲"尺寸需重点管控和检验.
2.3 material and product comply with Doc No."QW-Q-043"《material- and product-of restricted substance control specification》.
物料及成品必须符合QW-Q-043《材料与成品限用物质管理规范》.
3. The standards for the products.产品标准.
3.1 The cord shall comply with BS EN 50525. 线材须符合BS EN 50525.
3.2 The socket-outlet shall comply with BS1363-2 : 1995.
插板须符合BS1363-2 : 1995.




wiring method接线方式:

J1 cord J2
E—Yellow/Green 黄/绿色—E
L—Brown棕色—L
N—Blue蓝色—N



Section:A-A

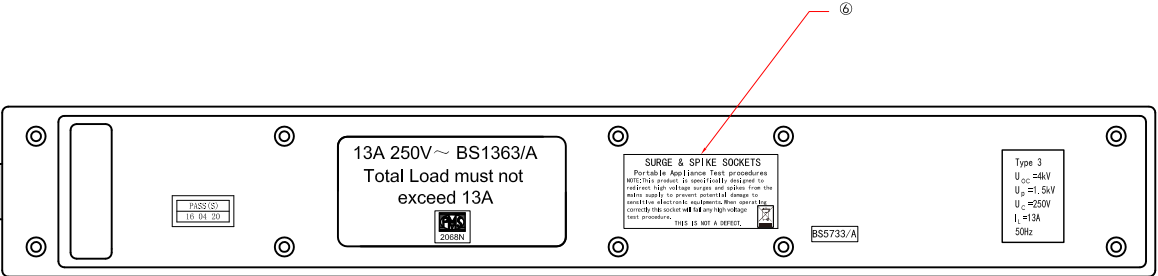

ITEM	NAME	DESCRIPTION	UNIT	QTY
⑩				
⑨				
⑧				
⑦	SLEEVE	Protecting of plug,Black	pcs	1
⑥	Q&A Label	Type L 25x15 Black character on white background	pcs	1
⑤	Socket assembly	UK 6 gang Socket assembly	pcs	1
④	PVC PELLET	55P black PVC pellets meeting RoHS,UL94 V-0.	g	
③	FUSE	13A fuse in line with BS 1363	pcs	1
②	INSERT	UK fuseplug insert with grounding,black	pcs	1
①	POWER CORD	A05VV-F 3G1.25mm ² Ø8.8±0.2mm white	mm	/



Part No. Description
PB-6W10MB 6 Way Power Extension Surge-Spike Protected Black 10m

Updated March 2022